





# PARALLAX


\*\*\*NOTE: VELCRO CAN NOT BE USED ON HORIZONTAL AND INCLINED SURFACES  
\*\*\*NOTE: IN CODES, "M" INDICATES MAGNET & "V" VELCRO INSTALLATION

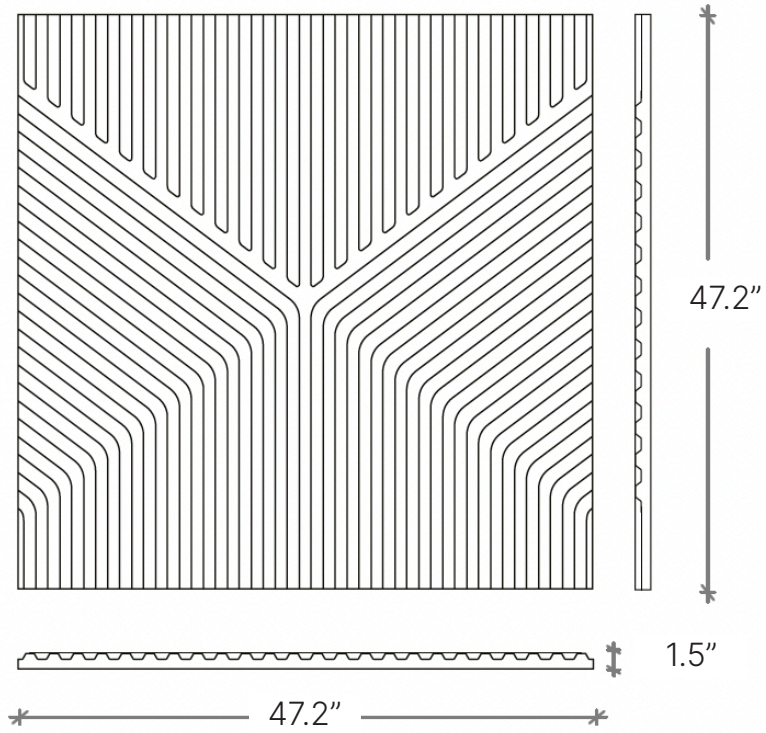

SS100 M/V

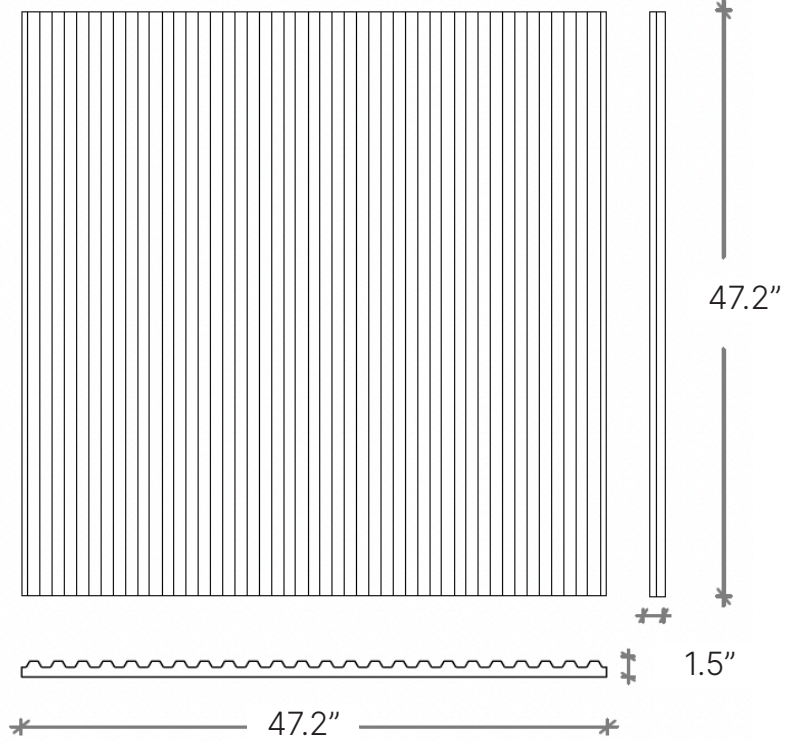


SS110 M/V

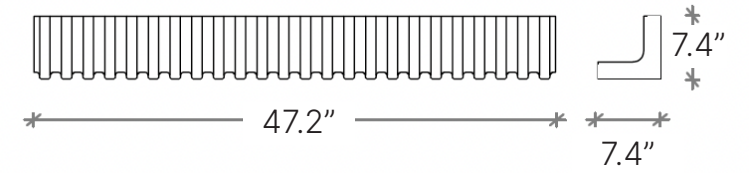

SS120 M/V

NEODYMIUM MAGNETS OR VELCRO DISKS ARE SCREWED TO THE SURFACE. FIX THE BRACKETS BEHIND THE PANEL TO THE MAGNETS OR VELCRO DISKS.

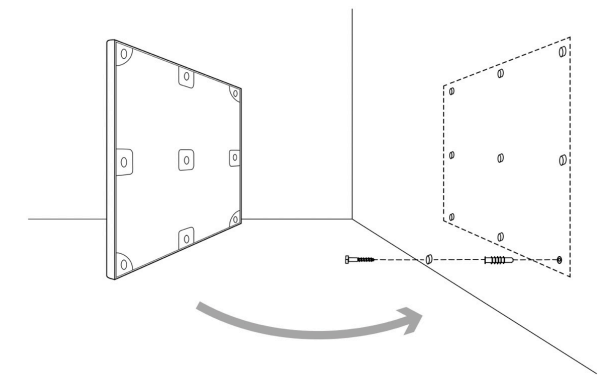

**High Acoustic Performance**  
ISO 11654 - EN 354  
A class NRC rates between 250hz and 5000hz



**Decorative & Suitable**  
Many Felt colour options with in  
Natural and Mandarin swatch cards



**Innovative & Creative**  
Turkey's first and leading company in acoustic  
PET felt



**Eco-Friendly & Healthy**  
MAS Certified Green LEED V4.1  
Recycled PET and premium poliester  
fibres,



**Easy to Clean & Install**  
Smart installation solutions  
with lightweight structure and bleach clean-



**Flammability Performance**  
ASTM E84 TUNNEL TEST  
Class A